

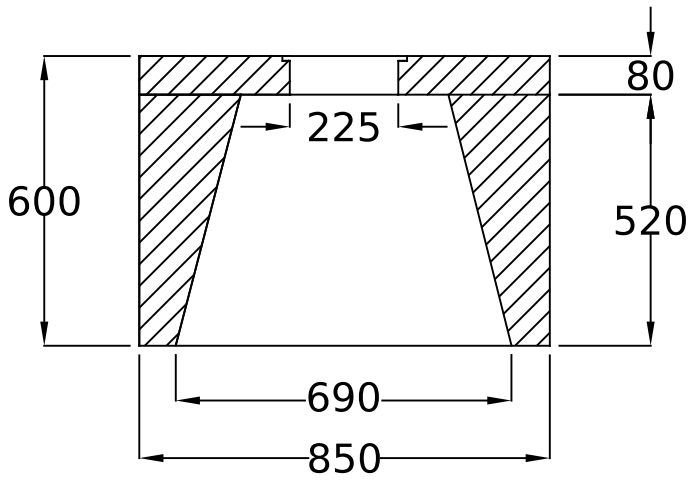


FRONT SECTION OF GATHER

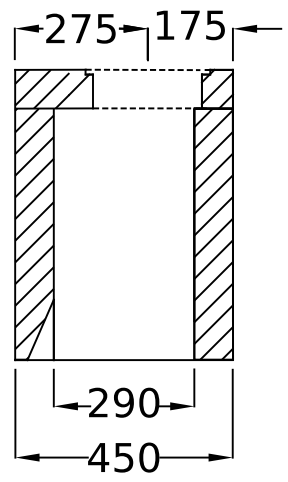

SIDE SECTION OF GATHER

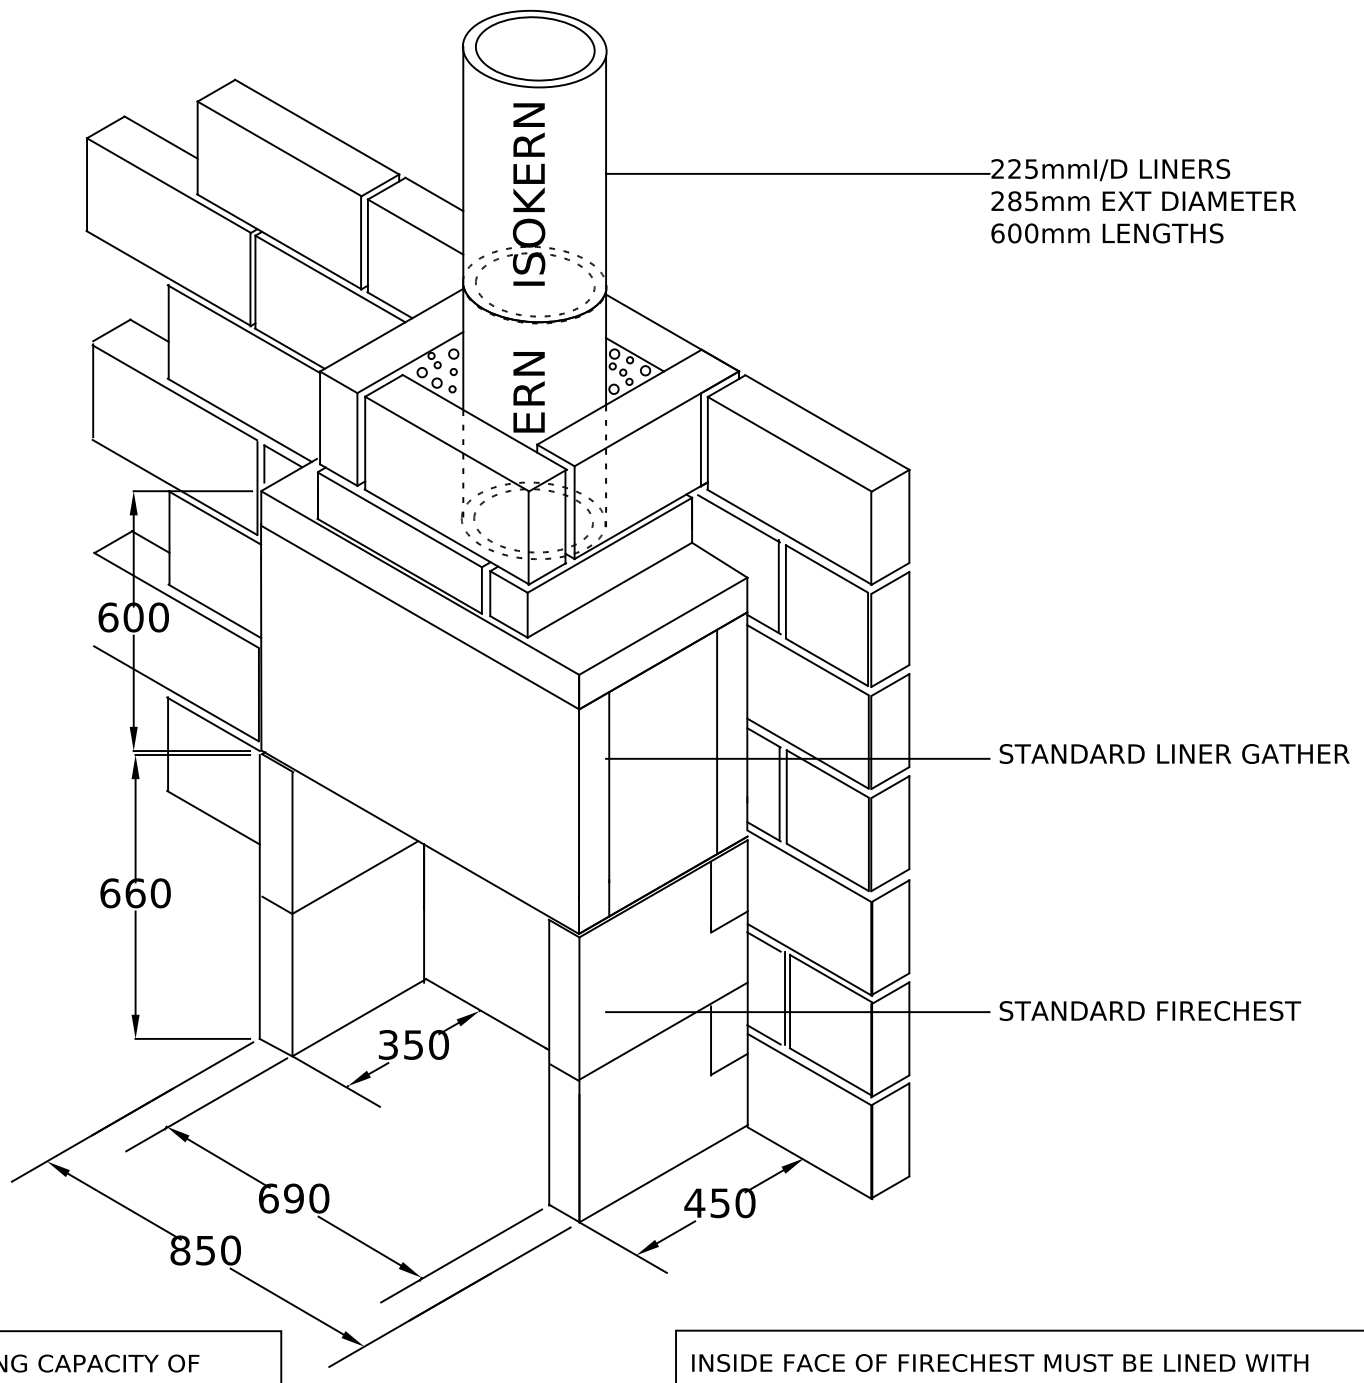

MAXIMUM LOAD BEARING CAPACITY OF FIRECHEST & GATHER IS 2500KG

INSIDE FACE OF FIRECHEST MUST BE LINED WITH A SUITABLE FIREBACK OR FIREBRICK SLIPS

DRAWING TITLE

ISOKERN STANDARD FIRECHEST AND GATHER WITH 225mm I/D REBATED LINER SYSTEM

DRAWING NO	STANDARD 2
SCALE	
DATE	01-08-14

Isokern Installation drawing: Standard Firechest and pumice gather detail Dimensions in mm. Indicative only, check with us before construction. www.isokernshop.co.uk